查询UM6167供应商 www.DataSheet.in

T-46-23-08

UM6167 16Kx1 High Speed CMOS SRAM

FEATURES

- High-speed – 45/55/70 ns Access Times
- Low Power Dissipation
  - 150mW (Typ.) Operating
  - 100 μW (Typ.) Standby
- Single 5V Power Supply
- Fully Static Operation
- All Inputs and Outputs Directly TTL Compatible
- Three State Outputs
- Data Retention Supply Voltage: 2.0 – 5.5V

PIN CONFIGURATION

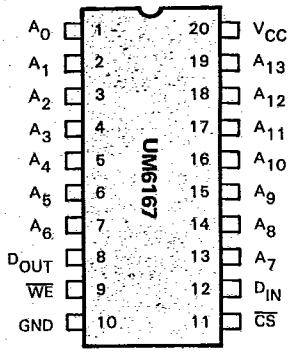

UM6168 4Kx4 High Speed CMOS SRAM

FEATURES

- High-speed – 45/55/70 ns Access Times
- Low Power Dissipation
  - 225mW (Typ.) Operating
  - 100μW (Typ.) Standby
- Single 5V Power Supply
- Fully Static Operation
- All Inputs and Outputs Directly TTL Compatible
- Three State Outputs
- Data Retention Supply Voltage: 2.0 – 5.5V

PIN CONFIGURATION